

Marthall Tree Products

T 01565 650526 sales@marthall.net www.marthall.net F 01565 650543


Chelford Road Ollerton Knutsford Cheshire WA16 8SZ

Dunham

Yarn stitching	Tufted, non-filled synthetic grass carpet
Yarn material	Polyethylene monofilament straight & polypropylene monofilament curled
Yarn type	8,000/8 dTex + 5,200/8 dTex
Yarn quality	Environmental friendly, UV stabilized, UV stability meets DIN 53387 standard Free of lead and cadmium
Colour fastness	DIN 54004 Grade 7 (Blue Scale)
Primary backing	100% PP Thiobac [®] with fleece, black, UV stabilized 155 g/m ²
Secondary backing	Black latex compound with a base of styrene-butadiene (SBR), with drainage holes 850 g/m ²

Tuft gauge	3/8"	+/-10%
Pile height	35 mm	+/-10%
Stitches per 10cm	14	+/-10%
Stitches per m ²	14,700	+/-10%
Face weight	1,600 g/m ²	+/-10%
Total weight	2,605 g/m ²	+/-10%
Roll width	4m (+0.2m)	+/- 2cm

Water permeability	60l/min/100cm ²
Fire retardant classification	Cfl-S1 (EN ISO 11925-2: sand filled ca. 5mm) Efl-S1 (EN ISO 11925-2; non filled)
Batch information	Before installation make sure the first 4 digits of the roll number are equal
Shrinkage	Shrinkage can appear due to extreme temperatures. Make sure the carpet can relax before cutting
Infill recommendation	Non infill (optional 5kg/m ²)

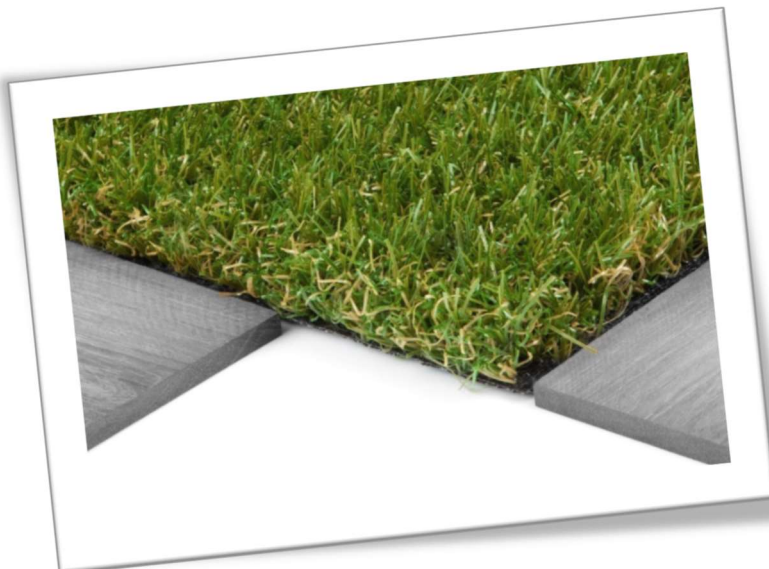

c-shape^{2.0}



Springback[™]
FIBRE TECHNOLOGY